

Cost-Effective Clustering

Steven Gottlieb

Department of Physics, Indiana University, Bloomington, IN 47405, USA

Small Beowulf clusters can effectively serve as personal or group supercomputers. In such an environment, a cluster can be optimally designed for a specific problem (or a small set of codes). We discuss how theoretical analysis of the code and benchmarking on similar hardware lead to optimal systems.

PACS/Keywords: 12.38.Gc, Lattice QCD, Linux, Beowulf Clusters, Supercomputing

1. INTRODUCTION

The Beowulf project began in 1994 at the NASA Goddard Space Flight Center. The history, current status and a list of about 100 clusters may be found at <http://www.beowulf.org>. This year at Supercomputing 2000, Gordon Bell sponsored a prize for a computer constructed or purchased for under \$10,000. Thus, cost-effective clustering is a timely topic.

I assume you need to do a lot of computation and need to get it done inexpensively rather than in the shortest time. It helps if you can run more than one job at a time. This should be contrasted with weather prediction, where being able to run seven one-day predictions that each take seven days is not very useful. For weather we must exceed a specific minimal speed that will let us predict tomorrow's weather from current conditions. The cost model presented here is based on capital expenditure for hardware. A more sophisticated model would include maintenance, electricity, cooling, floor space, etc.

These design principles are advocated:

1) Know the bottlenecks and requirements of your problem. With this knowledge, you can avoid building an unbalanced system that, for instance, might put too much money into a network whose high performance is not required. 2) Design for the sweet spot. (Note: the sweet spot changes with time and may depend on the problem.) As an example, the highest density memory available at any time tends to be quite expensive. Currently, it is less expensive to buy two 256 MB parts than one 512 MB part. 3) Design for total system cost effectiveness. If a 10% increase

in the speed of the processor results in a 5% performance increase, since the processor is only one component, the system price increase might be less than 5%. 4) Benchmark as much as you can before deciding on a design.

A cluster compute node can be very simple. Six items are (almost) mandatory: motherboard, CPU, memory, network card, case and floppy drive. The first three items will be the most expensive if using a FastEthernet network (unless you insist on using rack mounted cases). Otherwise, the network card will be a major expense. Some motherboards come equipped with a FastEthernet interface. I have also seen some systems without individual cases. A hard drive or video card may be useful. Some Beowulf designers discourage a hard drive on each compute node. If your application requires lots of scratch disk i/o, then you may need a disk on the node. When a node repeatedly fails to reboot, a video card can help diagnose the problem. (At IU in two years of running with 40 nodes, this has only been necessary about half a dozen times.) We have a few spare video cards to install when needed.

The Indiana University Physics Department received \$50,000 in 1998 to build a 32-node Linux cluster. The machine we built in Nov. 1998 is called CANDYCANE, which stands for CPUs And Network Do Your Calculation And Nothing Else. CANDYCANE is an appropriate name because it was designed for the "sweet spot," that is, components were picked to give the best price-performance ratio attainable. The cost per node was \$693 for a Pentium II 350, with a 4.3 GB hard drive and 64 MB of ECC RAM. Each node

has a floppy drive and a FastEthernet card. The 40-port HP Procurve switch cost about \$2,000, so the total cost was about \$25,000. In November, 2000 it would have been possible to build this system for <\$320 per node, or for approximately \$12,000. An even more attractive alternative would be a diskless Athlon 600 MHz system for which the per node cost is about \$275. This node would have much better performance than the PII 350; however, the FastEthernet would be a bottleneck on the MILC code with Kogut-Susskind quarks. Even so, a 32 node system with a minimum performance of 1280 and 1660 Mflops, for 8^4 and 14^4 sites per node, respectively, could be built for under \$10,500. This works out to a cost/MF of between \$6.3 and \$8.2.

In Sec. 2, we describe the key issues for good performance. Section 3 gives details of single node performance. Section 4 points the reader to a web site with extensive benchmarks, gives cost estimates for several designs and compares cost-performance ratios for these clusters and a number of supercomputers. For additional information about emerging technologies for clusters see Ref. [1].

2. KEYS TO PERFORMANCE

A very simple approach to achieving good performance for domain decomposition codes like Lattice QCD codes is to optimize single node performance and to try to avoid degrading performance too much when one has to communicate boundary values to neighboring nodes. The key to a cost effective design is an appropriate balance. Floating point performance is more easily adjustable than network performance because processors come in many speeds, but there are only a few choices for the network.

A simple performance model of the Kogut-Susskind Conjugate Gradient algorithm gives this bandwidth requirement to overlap communication and floating point operations:

$$MB = 48MF/(132L) = 0.364MF/L, \quad (1)$$

where MB is the *achieved* bandwidth in Megabyte/s, MF is the *achieved* floating point speed in Megaflop/s on matrix-vector multiplica-

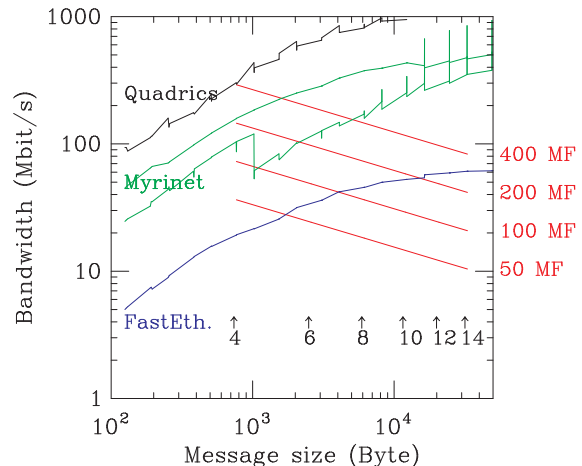


Figure 1. Measured bandwidth and the simple performance model.

tion and an L^4 portion of the grid is on each node. We assume there are neighboring nodes in each direction, *i.e.*, 16 or more nodes. The constant factor 0.364 is specific to KS quarks. However, the $1/L$ behavior is typical of the domain decomposition approach to parallelism and comes from the surface to volume ratio.

Figure 1 shows a log-log plot of measured bandwidth on a ping-pong test for three types of hardware and the performance model for several processor speeds. The messages vary in size from 800 bytes to 30 KB for problem sizes of interest. The arrows near the bottom of the graph correspond to different L values. The FastEthernet (blue) and Myrinet (green) curves come from measured performance on the Roadrunner (RR) supercluster at the Albuquerque High Performance Computer Center. Two curves are shown for Myrinet. With the newer drivers, bandwidth is better and smoother. The Quadrics curve comes from the Teracluster at Lawrence Livermore National Laboratory (LLNL). The measurement was done using the Netpipe program from the Ames Scalable Computing Laboratory [2]. The straight red lines come from the performance model presented above and are plotted for matrix times vector speeds of 50, 100, 200 and 400 MF. We need to run at a large enough value of L so that the mea-

sured bandwidth is above the straight line (for whatever speed our processor achieves for the corresponding value of L). Because of cache effects, the processors will achieve higher speeds when L is small, but that requires the highest bandwidth. Thus, pushing up the communication rate for small messages is important. Being able to run for a small value of L with high efficiency allows running a fixed size problem at high total performance. We see that none of the networks achieves more than a small fraction of its peak bandwidth for the message sizes of interest. A system design based on achieving that peak bandwidth would almost certainly be communication bound, *i.e.*, money would have been spent on floating point capacity that could not be used. There are large differences in the prices of FastEthernet, Myrinet and Quadrics hardware. Choice of network can obviously play a critical role in system performance and cost-effectiveness.

3. SINGLE NODE PERFORMANCE

The single node performance is likely to depend upon such issues as the quality of the CPU, the performance and size of cache(s), the bandwidth to main memory and the quality of the compiler. For message passing performance, key issues are the latency, peak bandwidth, processor overhead and the message passing software. It is important to make the right choices when designing your system.

For the CPU, one can choose among Intel Celeron, Pentium II, PIII, PIV, Itanium; AMD Athlon, Thunderbird, Duron; Compaq Alpha and other possibilities. The Celeron may have limited performance because it only has a 66 MHz front side bus (FSB). If access to memory is important (as it is for this application) the 100 or 133 MHz FSB of the PII and PIII will be useful. The PIV is quite new and currently expensive. Itanium is soon to be available and some results are provided below. The Alpha has great performance, but it is expensive.

There are currently several memory types available for different processors. They include PC100, PC133, Rambus, Double Data Rate (DDR), which is also known as PC1600 or PC

2100. PC100 and PC133 are fairly mature at this stage, and there is little difference in price (currently about 0.5\$/MB). Rambus was quite expensive at introduction, but has recently decreased quite a bit (currently slightly more than 1\$/MB). DDR is just now coming to market (Micron), but it does not carry too much of a premium (currently similar to Rambus). Motherboards that use DDR memory are just coming to market. Pick the right amount of memory for your problems: you never want your code to swap, but neither do you want to buy a lot of memory that you never use.

Choice of motherboard is crucial. It must be matched to the processor and memory. The support chip can have an important impact on performance (as we explore below). The motherboard determines the number of processors per node. We discuss below whether dual processor systems are more or less cost-effective for a particular application. The motherboard will also determine whether you have a faster or wider PCI bus than the initial standard 33 MHz-32bit bus. This may be important if you have a higher speed network like Myrinet.

The last critical choice is the network hardware and software. It properly deserves its own section, but to save space we briefly discuss it here. FastEthernet is the commodity network. Other choices such as Myrinet, Giganet, Gigabit Ethernet, Quadrics QSnet and SCI from Dolphin/Scali have higher performance, but are quite expensive compared to FastEthernet. (Including the card and switch, you can expect to spend about \$1,500 per node, except for Quadrics which is over \$3,000 per node.) Because of the big jump in price and performance, it is necessary to make sure the system maintains balance between CPU and network. Regarding software choices, under FastEthernet, MVIA[3] and GAMMA[4] software have reduced latency compared with standard TCP/IP. I have recently tried VMI under Myrinet which is being developed at NCSA and found it to be superior to running under standard GM (Myrinet supplied) driver.

Turning next to single node performance, we note that it is easy to waste a lot of money on a poor system design. To illustrate this, we

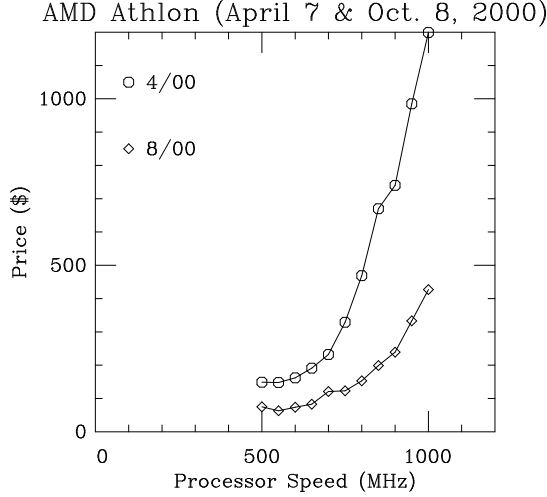


Figure 2. Processor price *vs.* speed.

consider the various speed AMD Athlon processors available and their prices on two particular days. Although we focus on Athlon here, the same considerations apply to Intel or other processors. Figure 2 shows that processor price is a rapidly increasing function of speed. It can also be a rapidly decreasing function of time, especially for the faster processors.

Dividing the price by the speed of the chip, we find that the relative expense rises rapidly for the faster chips [5]. On April 7, 2000, there was an apparent sweet spot at 600 MHz. The faster chips have a higher price-performance ratio. Depending upon the costs of the other components of the system, the entire system may have a higher or lower price-performance ratio.

For our QCD codes, access to memory is quite important. In our first example, we compare a Celeron chip with a 66 MHz FSB and a Pentium II chip with a 100 MHz FSB. The Pentium's clock speed is only 6% faster than the Celeron, but its performance is 38% faster for $L=6$ and 23% faster for $L \geq 8$. This is because of its larger cache and 52% faster FSB. When we overclock the Celeron, it has a slower FSB but a faster CPU speed than the PII, and performance is about equal except for $L=6$ where the smaller cache probably is the source of the difference.

Table 1

MegaFlop rate of Intel Processors

CPU	Celeron	Celeron	PII
Clock(MHz)	330	416(OC)	350
FSB(MHz)	66	82	100
L	MF	MF	MF
4	102	117	113
6	60	74	83
8	57	71	72
10	57	71	70
12	56	70	70
14	56	71	70

Table 2

MegaFlop rate of Athlon Processors

L	500 MHz	600 MHz
4	231	276
6	129	135
8	97	102
10	92	97
12	90	95
14	89	93

By comparing 500 MHz and 600 MHz Athlons, we demonstrate that performance does not increase in proportion to the speed of the chip. This is because memory access is fixed by the FSB speed.

The 600 MHz chip has a peak speed 20% faster than the 500 MHz chip. With 4^4 lattice points, we do see a 20% speed up, but for the larger problem sizes that do not fit into cache, there is only a 5% speedup. We expect that for even faster processors, performance increases will be marginal.

Since memory access is so crucial, I have purchased a Pentium III 533B chip that uses PC133 memory. In theory, it should provide about 33% better performance than a similar chip with PC100 memory. I have tried three different motherboards using different support chips and the results are disappointing. The Gigabyte GA6VXE+ motherboard uses a VIA chip set, the Supermicro (SM) PIIISED uses the Intel 810e chip set, and I also tried an Intel CC820 motherboard using the Intel 820 chip set. The results are not particularly better than a PII350 or 450 MHz chip using a BX motherboard, except when

Table 3

Megaflop rates of various motherboards and CPU combinations or cluster nodes

L	Gigabyte GA6VXE+ Pentium III 533B	Intel CC820 PIII 533B	SM PIIISED PIII 533B	SM P6SBA PII 350	RR † PII 450	LL ‡ PIII 733
4	186	182	174	114	142	319
6	106	98	94	83	99	140
8	81	75	73	72	82	130
10	76	72	70	70	79	127
12	76	70	69	70	78	127
14	73	70	69	70	78	126

† Roadrunner: Portland Group compiler

‡ Los Lobos: Portland Group compiler

the problem fits in cache. In the future, I hope to test whether the PIII prefetch instructions can be used to improve this situation. (This technique would also be applicable to a BX motherboard with PIII installed.) The next version of the Portland Group Compiler is supposed to have better facilities for telling the compiler when to prefetch data to cache. (See Table 3.)

It is possible that the 815e support chip from Intel will provide better performance with the 133 MHz FSB, but I have not done any tests myself. There are benchmarks at the Intel developer's web site that look promising. However, there are support chips from ServerWorks that support PC133 memory well. Here are results from Los Lobos (LL), that uses Intel 733 MHz chips in IBM Netfinity servers that use a ServerWorks chip set. SuperMicro is manufacturing a dual processor motherboard that uses a support chip from ServerWorks, but the motherboard currently costs about \$280, which is about twice the price of dual processor BX motherboard. Also, this board requires registered memory which will add to the cost of the system.

You might have noticed above that the Athlon numbers are fairly impressive especially considering that an Athlon chip will cost less than an Intel chip at comparable speed. There has been good news recently on the Athlon front. DDR memory is now available from Micron, and there will soon be motherboards that use the AMD 760 chipset which supports DDR memory. Dual processors have not been available for the Athlon, but there will be an AMD 760MP chip that will support

dual processors. On October 10, 2000, AMD announced a demonstration dual-CPU DDR system, so it should not be too many more months before these are available to the consumer.

With the help of programmers at Intel, the MILC benchmarks have been tuned and run on several Intel Itanium(tm) based systems. The code that was run does not include any assembler instructions, but prefetching hints to the compiler have been inserted to enhance performance. The Itanium(tm) processors have the best performance we have seen for our code.

Table 4

Megaflop rate of Itanium Processors

	600 MHz	667 MHz	800 MHz
L	100×1	133×2	133×2
	2MB/1GB	4MB/4GB	4MB/2GB
4	692	761	916
6	646	726	867
8	290	591	732
10	214	464	539
12	187	330	359
14	178	301	326

It should be noted that the 667MHz processor is a pre-production pilot. The two faster processors have double-pumped front side bus and they also have a larger cache. By looking at ratios of results we can see the effects of cache size, external memory speed and processor speed. A second

table and interpretation of the relative performance may be found in the original transparencies[5].

4. PRICE-PERFORMANCE RATIOS & BENCHMARKS

The simple performance model presented above can help us predict when the communication and floating point are in reasonable balance, but it is no substitute for real benchmarks. A web site for MILC benchmarks may be found at physics.indiana.edu/~sg/milc/benchmark.html. All the benchmarks presented are for single precision Kogut-Susskind conjugate gradient. Due to limitations of space and time, we refer the reader to the web site.

We consider bare-bones cluster nodes with either 450 MHz PII chips as in Roadrunner, or 733 MHz PIII chips as in Los Lobos. For the Los Lobos level system, we are assuming a Server-Works dual-CPU capable motherboard will have comparable performance to the IBM Netfinity nodes. Each node contains 64 MB of ECC memory per processor and a 4.3 GB hard drive. Prices are based on a search of www.pricewatch.com on Oct. 31, 2000. Performance expectations are based on Roadrunner or Los Lobos. (An AMD Athlon based system was considered in Sec. 1.)

To build a single CPU node like Roadrunner, but with 64 MB of memory would cost \$325. A dual CPU node, with 128 MB would cost \$527. If more memory is desired, it should cost less than \$1 per Megabyte. Los Lobos style nodes are \$634 and \$878, for single and dual cpu, respectively. Per port FastEthernet switch costs are about \$56, \$185 and \$240, for 32, 72 and 144 ports, respectively. Myrinet cost is \$1527 per port and scales linearly up to 128 ports with the Clos switches. These prices are for LANai 9, Myrinet 2000 cards, and better network performance than on Los Lobos is expected.

For a single CPU RR level system, the price-performance ratio in \$/MF is 7.2–9.3, 10–13, $\approx$ 11–15 and 28–31, for FastEthernet with 32, 64, 128 nodes and Myrinet, respectively. With dual CPUs, the numbers are 8–11, 12–16, 14–19 and 20–23. We see that the second CPU makes the

Table 5

Price-performance ratios

Computer (date of quote)	\$/MF
RR level 1 CPU FE (10/00)	7–15
RR level 1 CPU Myrinet (10/00)	28–31
RR level 2 CPU FE (10/00)	8–19
RR level 2 CPU Myrinet (10/00)	20–23
LL level 1 CPU FE (10/00)	11–17
LL level 1 CPU Myrinet (10/00)	20–22
LL level 2 CPU Myrinet (10/00)	16–21
64-node SGI Origin 250 MHz (2/99)	193
44 node Cray T3E (2/99)	480
256 node IBM Power 3 SP (2/00)	166
with estimated discount	91
64 CPU Compaq Alpha Server SC	150

Myrinet based system considerably more cost effective; however, for FastEthernet, although the marginal cost is small, the performance gain is not that great either, and the system is less cost effective. With the more expensive and higher performance LL level nodes, FastEthernet cost in \$/MF is about 11, 14 and 17, and Myrinet is 20–22 for single CPU systems. With a second processor the Myrinet number drops to 16–21. Dual CPU benchmarks have not been run with FastEthernet, but the network performance should be even more of an issue here, and we expect the cost effectiveness to be somewhat less.

This work was supported by the U.S. DOE under grant DE-FG02-91ER 40661. Special thanks to the MILC collaboration, the Albuquerque High Performance Computer Center, Indiana University, LLNL, National Center for Supercomputing Applications, Pittsburgh Supercomputer Center and San Diego Supercomputer Center.

REFERENCES

1. See <http://physics.indiana.edu/~sg/pcluster.html> for several talks on cluster technology and application performance.
2. Visit <http://www.scl.ameslab.gov>. Netpipe can be downloaded from there.
3. To find out more about M-VIA, see <http://www.nersc.gov/research/FTG/via>.

4. See the GAMMA web site of G. Ciaccio,
<http://www.disi.unige.it/project/gamma/>.
5. See <http://physics.indiana.edu/~sg/ccp2000/>
for this graph and others not included here.